


REV.	Description	Date
1	upgrade drawing	2011/10/5
2	add contacts number	2013/1/29

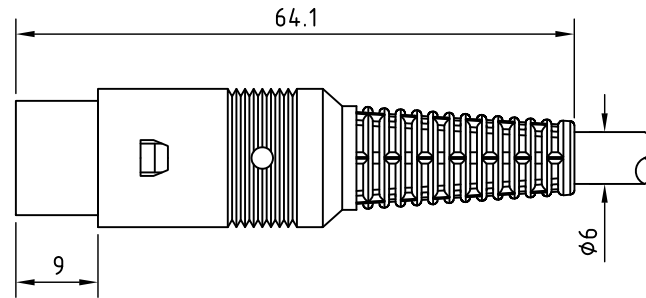

Specification:

Rating: 100V AC 1A max.

Contact resistance:

Pin 30m $\Omega$  max.



Shell 50m $\Omega$  max.

Insulation resistance:

100M $\Omega$  at 500V DC min.


Voltage withstand:

250V AC for 1 minute

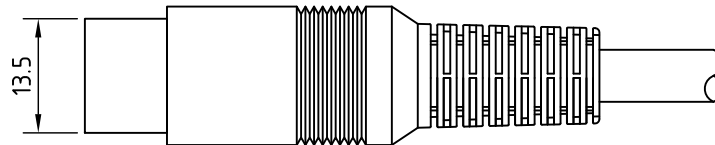

RoHS

TOLERANCE X $\pm$ 0.5 X.X $\pm$ 0.3



13P

CONTACT ARRANGEMENT FRONT VIEW (MALE)	3P	4P	5AP	5BP	5CP	6P	7P	8AP	8BP

5	Terminals	Brass	Nickel plated
4	Housing	ABS	
3	Shield cover B	Steel	Nickel plated
2	Shield cover A	Steel	Nickel plated
1	Shell cover	EVA+LLDPE	
Item	Description	Material	Treat & Remark



Unicable Co., Ltd. 國陽電業有限公司

5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.

http://www.unicable.com.tw TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2016/10/7	PART NO.	UT-A962-XP
DWN	GINA	REV.	2
CHK			
ITEM	DIN Connector Field Assembly Cable	UNIT	MM