


REV.	Description	Date
1	upgrade drawing	2012/11/15

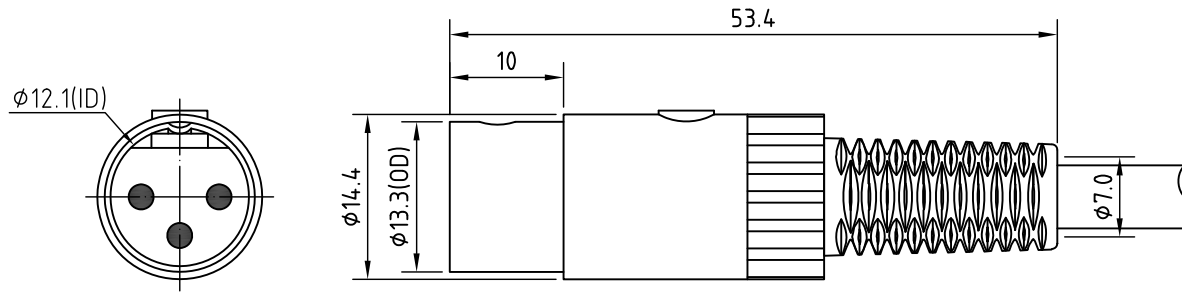

Specification:

1. Current carrying capacity: 12V DC 2A max.
2. Contact resistance: 20mΩ max.
3. Insulation resistance: DC 500V 100MΩ min.
4. Dielectric strength: AC 800V / 1 minute

RoHS

TOLERANCE X±0.5 X.X±0.3

CONTACT ARRANGEMENT FRONT VIEW (MALE)	3P	4P	5AP	5BP	5CP	6P	7P	8AP	8BP



Unicable Co., Ltd. 國陽電業有限公司

5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2016/10/7	PART NO.	UT-A982-XP
DWN	GINA	REV.	1
CHK			
ITEM	Din Connector Field-Assembled Cable	UNIT	MM