

REV.	Description	Date
1	upgrade drawing	2015/6/10

### Specification of connector

#### General Characteristics


- Locking system : snap-in
- Termination : crimp moulded
- Shell protection : IP67
- Contact resistance :  $\leq 10\text{m}\Omega$
- Insulation resistance :  $\geq 10\text{M}\Omega$

#### Materials

- Pin contact : brass
- Contact plating : gold
- Male insert : PA
- Ring nut : PA

### Specification of cable

Material Jacket	PVC	PUR
-----------------	-----	-----

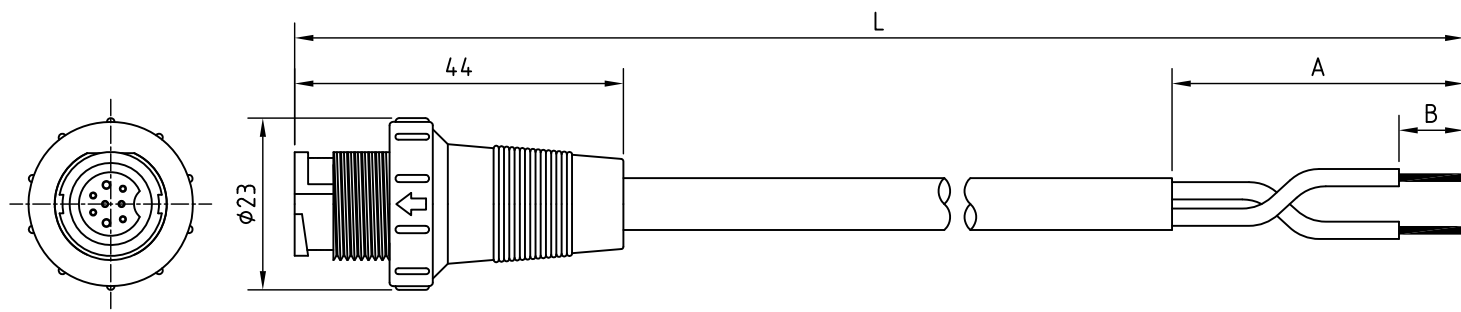

RoHS

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)	2P	3P	4P	5P	6P	8P
Rated voltage	250V			125V		125V
Rated current	5A			5A		2A/5A



**Unicable Co., Ltd. 國陽電業有限公司**  
 5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.  
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2016/10/7	PART NO.	UT-D208F2-XP
DWN	GINA	REV.	1
CHK			
UNIT	MM		

ITEM	CIRCULAR CONNECTOR TYPE B
------	---------------------------