

| REV. | Description | Date |
|------|-----------------|-----------|
| 1 | upgrade drawing | 2015/6/10 |

Specification of connector

General Characteristics


- Locking system : snap-in
- Termination : crimp moulded
- Shell protection : IP67
- Contact resistance : $\leq 10\text{m}\Omega$
- Insulation resistance : $\geq 10\text{M}\Omega$

Materials

- Pin contact : brass
- Contact plating : gold
- Male insert : PA
- Ring nut : PA

Specification of cable

| | | |
|-----------------|-----|-----|
| Material Jacket | PVC | PUR |
|-----------------|-----|-----|

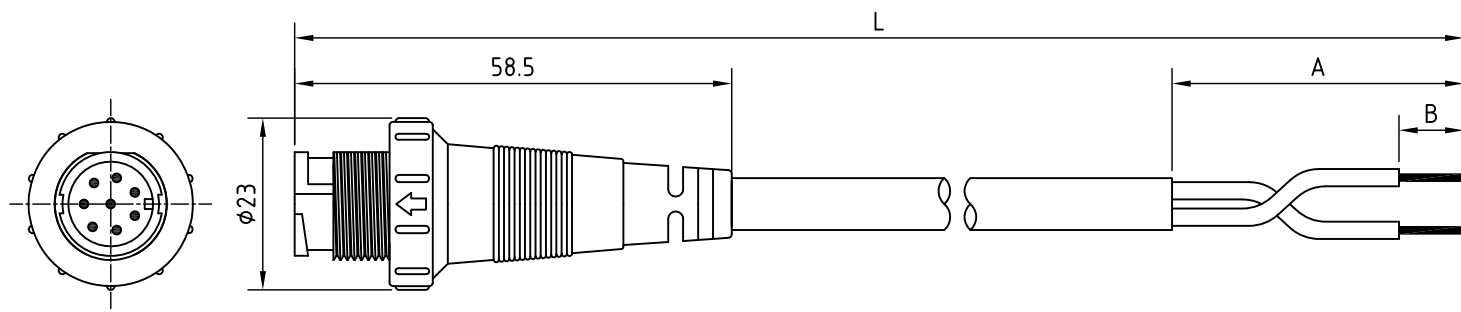

RoHS

| | | | | | | | |
|---------------------------------------|------|----|----|------|----|----|----|
| CONTACT ARRANGEMENT FRONT VIEW (MALE) | | | | | | | |
| | 2P | 3P | 4P | 5P | 6P | 7P | 8P |
| Rated voltage | 250V | | | 125V | | | |
| Rated current | 5A | | | 5A | | | |



Unicable Co., Ltd. 國陽電業有限公司
 5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

| | | | |
|------|-----------|----------|--------------|
| DATE | 2016/10/7 | PART NO. | UT-D208M1-XP |
| DWN | GINA | REV. | 1 |
| CHK | | | |
| UNIT | MM | | |

| | |
|------|---------------------------|
| ITEM | CIRCULAR CONNECTOR TYPE B |
|------|---------------------------|