


REV.	Description	Date
1	rated voltage revise	2018/10/5

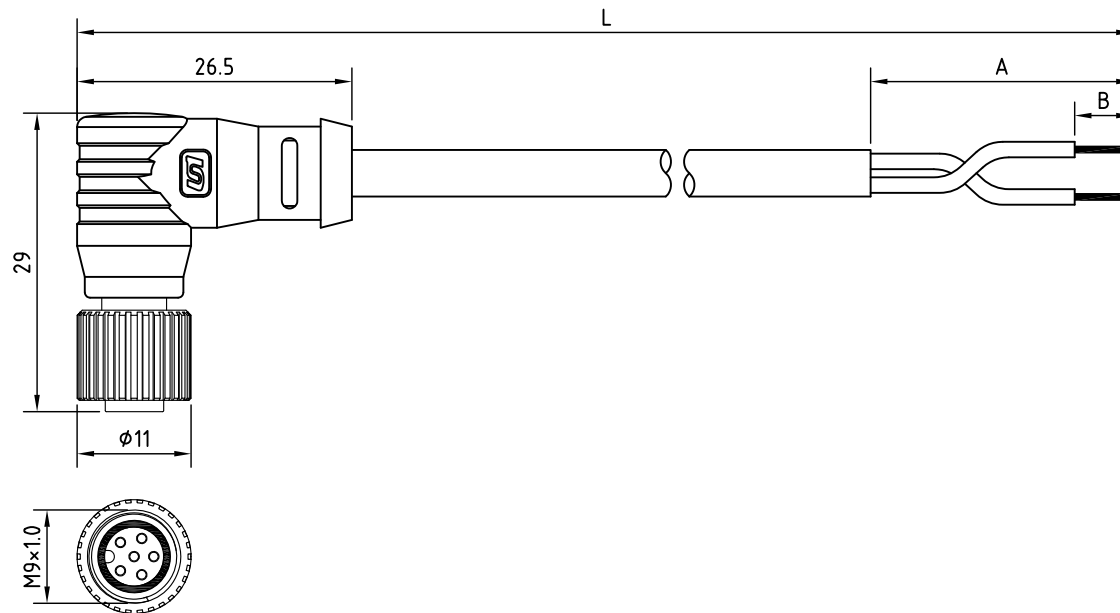

## Specification of connector

### General Characteristics

Locking system	: screw M9
Termination	: solder
Shell protection	: IP68
Contact resistance	: $\leq 10\text{m}\Omega$
Insulation resistance	: $\geq 10\text{M}\Omega$

### Materials

Socket contact	: brass
Contact plating	: gold
Female insert	: PA
Ring nut	: PA
O-ring	: rubber

## Specification of cable

Material Jacket	PVC	PUR

RoHS

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)	3P	4P	5P	6P
Rated voltage	125V		60V	
Rated current	5A		2A	



**Unicable Co., Ltd. 國陽電業有限公司**

5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan, R.O.C.  
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2018/10/5	PART NO.	UT-D251F4-XP
DWN	GINA	REV.	1
CHK			
UNIT	MM		

ITEM	Sensor Connector M9
------	---------------------