


REV.	Description	Date
3	contact resistance revise	2016/4/19
4	rated current revise	2018/10/5
5	part number change	2025/3/11

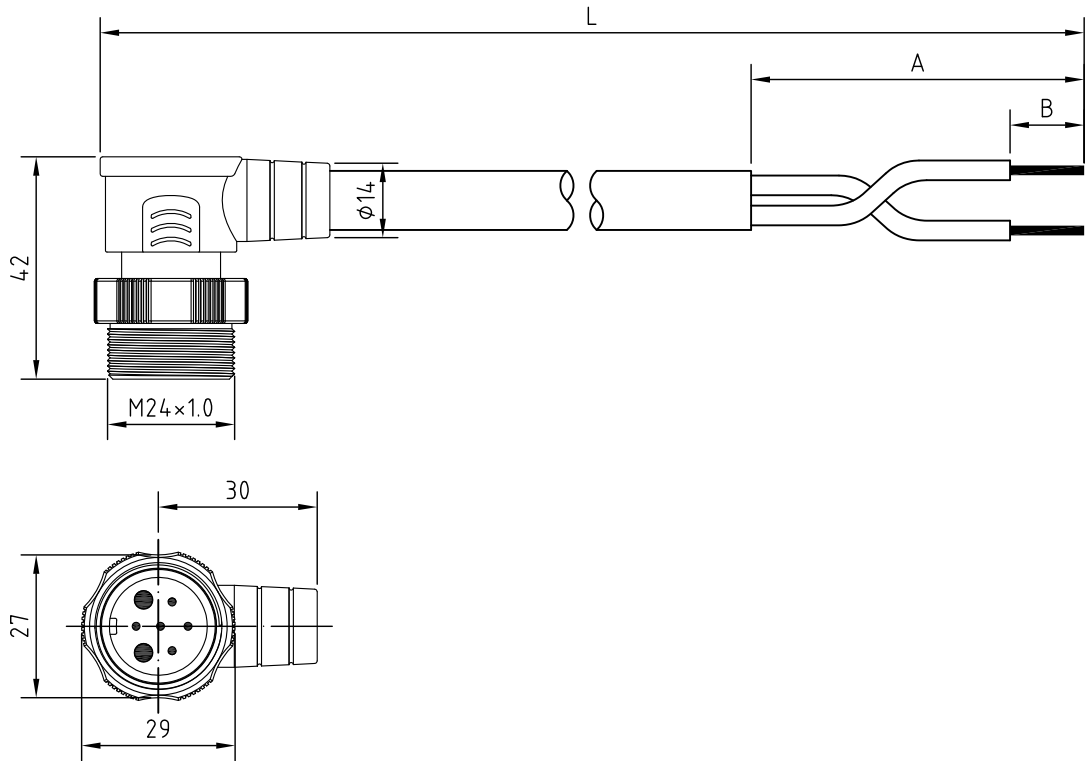

Specification of connector

General Characteristics

Locking system	: screw M24
Shell protection	: IP67
Rated voltage	: 360V
Rated current	: Large pin 35A : Small pin 10A
Contact resistance	: Large pin <5mΩ : Small pin <30mΩ

Materials

Pin contact	: brass
Contact plating	: gold
Male insert	: PA
Ring nut	: brass/chromium plated

Specification of cable

Material	Jacket	PVC	PUR
----------	--------	-----	-----

RoHS

CONTACT ARRANGEMENT FRONT VIEW (MALE)												
	02P	03A	04P	05A	05B	05C	06A	06B	07A			
 Unicable Co., Ltd. 國陽電業有限公司 5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan http://www.unicable.com.tw Tel:+886-2-2286-2122 Fax:+886-2-2286-1010							PART NO.		3201A-A03M15xxx-01/UT-D258M5-XP			
							DATE		2025/3/11	UNIT		MM
							DWN		GINA	REV.		5
ITEM	High Power M24						CHK					