

REV.	Description	Date
8	rated current revise	2018/10/5
9	arrangement revise	2020/11/23
10	part number change	2024/11/5

Specification of connector

General Characteristics


- Locking system : screw M24
- Shell protection : IP67
- Rated voltage : 360V, 60V(9BP)
- Rated current : Large pin 35A
: Small pin 10A
- Contact resistance : Large pin <5mΩ
: Small pin <30mΩ
- Insertion force : <80N
- Withdrawal force : <80N

Materials

- Pin contact : brass
- Contact plating : gold
- Male insert : PA
- Ring nut : brass/chromium plated

Specification of cable

Material Jacket	PVC	PUR
-----------------	-----	-----

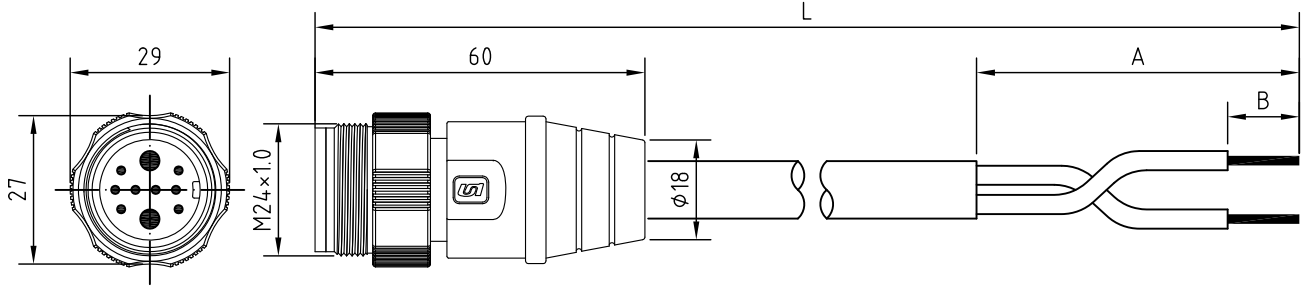

RoHS

CONTACT ARRANGEMENT FRONT VIEW (MALE)								
	02A	08P	09P	10P	03B	07B	09A	09B



Unicable Co., Ltd. 國陽電業有限公司
 5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan
<http://www.unicable.com.tw> Tel:+886-2-2286-2122 Fax:+886-2-2286-1010

PART NO.	3201A-A01M15xxx-01/UT-D259M3-XP		
DATE	2024/11/5	UNIT	MM
DWN	GINA	REV.	10
CHK			

ITEM	High Power M24
------	----------------