REV.	Description	Date
1	arrangement revise	2012/11/21
2	arrangement , rate voltage revise	2014/6/13
3	contact resistance revise	2016/4/19
4	rated current revise	2018/10/5

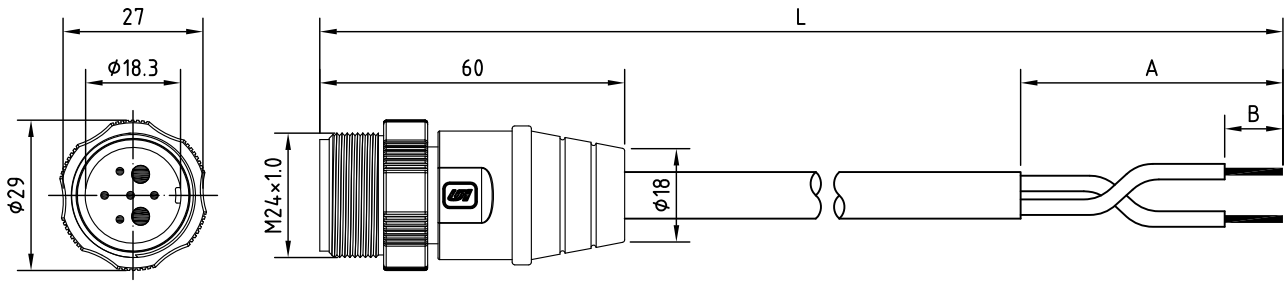

Specification of connector

Locking system : screw M24
Shell protection : IP67
Rated voltage : 360V
Rated current : Large pin 35A
Small pin 10A
Contact resistance : Large pin <5mΩ
Small pin <30mΩ

Materials
Pin contact : brass
Contact plating : gold
Male insert : PA
Ring nut : brass/chromium plated

Specification of cable

Material Jacket	PVC	PUR

RoHS

CONTACT ARRANGEMENT FRONT VIEW (MALE)



2P	3AP	4P	5AP	5BP	5CP	6AP	6BP	7AP

Unicable Co., Ltd.國陽電業有限公司
5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan, R.O.C.
http://www.unicable.com.tw TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2018/10/5	PART NO.	UT-D259M5-XP
DWN	GINA	REV.	4
CHK			
UNIT	MM		

ITEM: High Power M24