


REV.	Description	Date
1	rate voltage revise	2014/6/13
2	rated voltage, contact resistance, insertion/withdrawal force revise	2016/4/19
3	rated current revise	2018/10/5

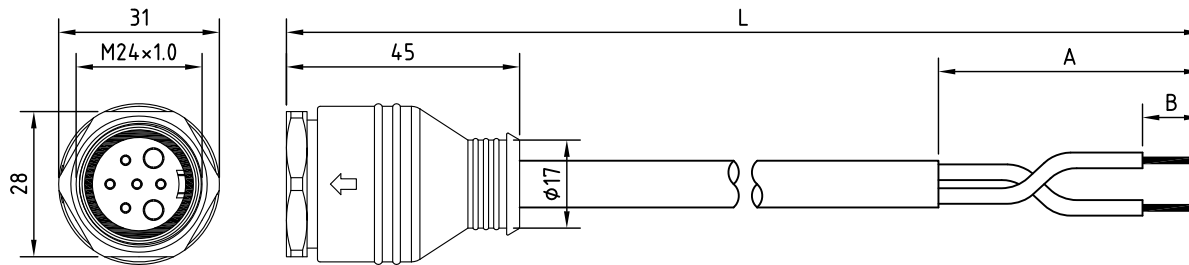

### Specification of connector

Locking system : screw M24  
 Shell protection : IP67  
 Rated voltage : 360V, 60V(9BP)  
 Rated current : Large pin 35A  
                   Small pin 10A  
 Contact resistance : Large pin <5mΩ  
                       Small pin <30mΩ  
 Insertion force : <80N  
 Withdrawal force : <80N

### Materials

Socket contact : brass  
 Contact plating : gold  
 Female insert : PA  
 Shell : brass/chromium plated  
 O-ring : rubber

### Specification of cable

Material Jacket	PVC	PUR

RoHS

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)	CONTACT ARRANGEMENT FRONT VIEW (FEMALE)					CONTACT ARRANGEMENT FRONT VIEW (FEMALE)											
	2AP	8P	9P	10P	9BP	2P	3AP	3BP	4P	5AP	5BP	5CP	6AP	6BP	7AP	7BP	9AP



**Unicable Co., Ltd. 國陽電業有限公司**

5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan, R.O.C.  
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2018/10/5	PART NO.	UT-D289F3-XP
DWN	GINA	REV.	3
CHK			
ITEM	High Power M24	UNIT	MM