



Part No.: UT-2981-X-X

seal  
 1- cable OD:7.1-9mm  
 2- cable OD:4-7mm  
 3- cable OD:9.1-10.5mm  
 4- cable OD:(2.5-4.5mm)×2

contact partition  
 1- conductor awg#14-16(2.8mm<sup>2</sup>~1.0mm<sup>2</sup>)  
 2- conductor awg#18-22(0.9mm<sup>2</sup>~0.3mm<sup>2</sup>)  
 3- conductor awg#10-12(5.3mm<sup>2</sup>~2.9mm<sup>2</sup>)

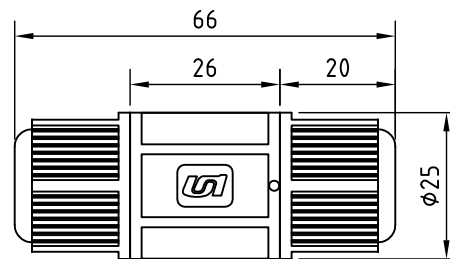


REV.	Description	Date
1	seal cable OD revise	2011/4/21
2	增加contact partition, seal-3規格	2012/10/1
3	增加seal-4規格, 增加SPEC.	2013/3/28
4	item6 Q'TY revise	2014/6/12
5	contact partition材質變更	2016/4/12
6	cable OD revise	2016/4/19
7	contact partition spec. revise	2019/12/9

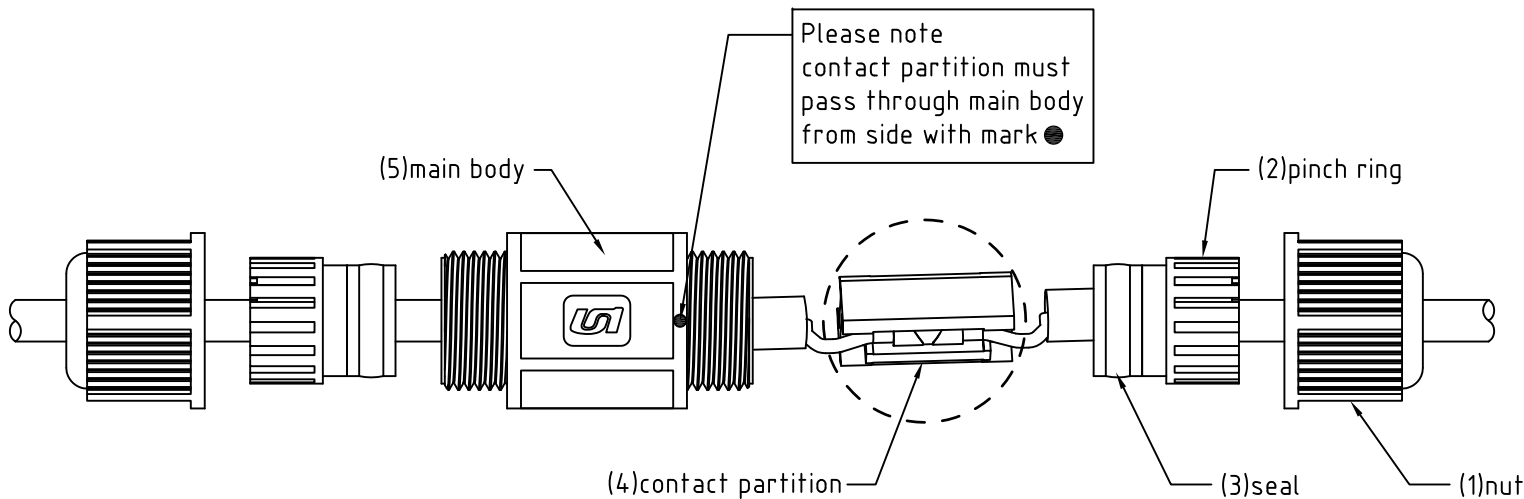

Specification:

1. Color: Black
2. Current rating: 16A
3. Voltage rating: 250V
4. Flammability: UL94 HB
5. IP rating: IP68
6. Temperature max.: 70°C
7. Temperature min.: -40°C

Cable preparation

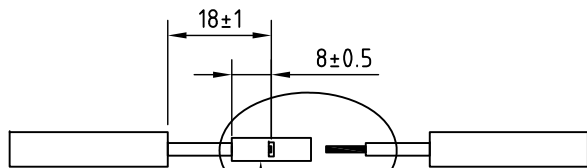

(6) Non-insulated butt connectors connect two conductors by non-insulated butt connectors by solder or crimp method

6	Non-insulated butt connectors	Copper tube	2~4
5	Main body	PA	1
4	Contact partition	PA+GF	1
3	Seal	TPR	2
2	Pinch ring	PA	2
1	Nut	PA	2
Item	Description	Material	Q'TY

RoHS

TOLERANCE ±0.5 UNLESS SPECIFIC



**Unicable Co., Ltd. 國陽電業有限公司**

5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.

http://www.unicable.com.tw TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2019/12/9	PART NO.	UT-2981-X-X
DWN	GINA	REV.	7
CHK			
UNIT	MM		

ITEM

CABLE JOINER