

Part No. : UT-5254-XP-X


pin no.

- 1-cable OD : 5.5-6.5mm
- 2-cable OD : 6.6-7.5mm
- 3-cable OD : 7.6-8.5mm


REV.	Description	Date

Specification of connector

- Locking system : Twist Lock
- Termination : solder
- Shell protection : IP68
- Contact resistance : $\leq 10\text{m}\Omega$
- Insulation resistance : $\geq 10\text{M}\Omega$

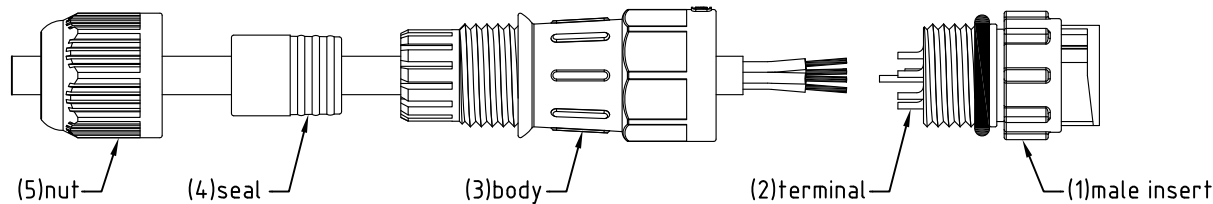

Cable preparation



RoHS
TOLERANCE ± 0.5

5	Nut	PA
4	Seal	TPR
3	Body	PA
2	Terminal	Brass/Gold plated
1	Male insert	PA
Item	Description	Material&Plating

CONTACT ARRANGEMENT FRONT VIEW (MALE)	2P	3P	4AP	4BP	5P	6P	7P	8P	10P	12P
Rated voltage	250V			250V	125V			60V		
Rated current	10A				5A			2A		



Unicable Co., Ltd. 國陽電業有限公司

5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan
http://www.unicable.com.tw Tel:+886-2-2286-2122 Fax:+886-2-2286-1010

DATE	2020/9/25	PART NO.	UT-5254-XP-X
DWN	GINA	REV.	0
CHK			
UNIT	MM		

ITEM	Sensor Connector M15.5
------	------------------------