


pin no.
 Part No. : UT-5255-XP-X
 1-cable OD : 5.5-6.5mm
 2-cable OD : 6.6-7.5mm
 3-cable OD : 7.6-8.5mm


REV.	Description	Date

Specification of connector

Locking system : screw M15.5
 Termination : solder
 Shell protection : IP68
 Contact resistance : ≤10mΩ
 Insulation resistance : ≥10MΩ

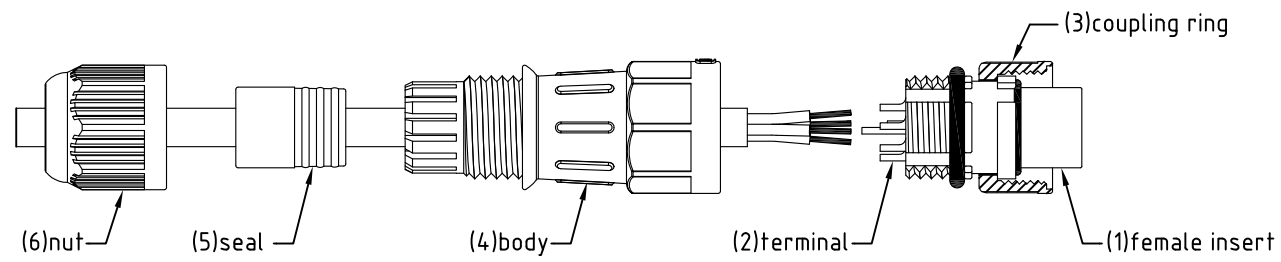

Cable preparation



RoHS
 TOLERANCE ±0.5

6	Nut	PA
5	Seal	TPR
4	Body	PA
3	Coupling ring	PA
2	Terminal	Brass/Gold plated
1	Female insert	PA
Item	Description	Material&Plating

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)	2P	3P	4AP	4BP	5P	6P	7P	8P	10P	12P
Rated voltage	250V		250V		125V			60V		
Rated current	10A		5A			2A				



Unicable Co., Ltd. 國陽電業有限公司
 5F., No. 111-33, Sec. 4, San Ho Road., San Chung Dist., New Taipei City, Taiwan
<http://www.unicable.com.tw> Tel:+886-2-2286-2122 Fax:+886-2-2286-1010

DATE	2020/9/25	PART NO.	UT-5255-XP-X
DWN	GINA	REV.	0
CHK			
UNIT	MM		

ITEM	Sensor Connector M15.5
------	------------------------