


| REV. | Description     | Date      |
|------|-----------------|-----------|
| 1    | upgrade drawing | 2014/3/17 |

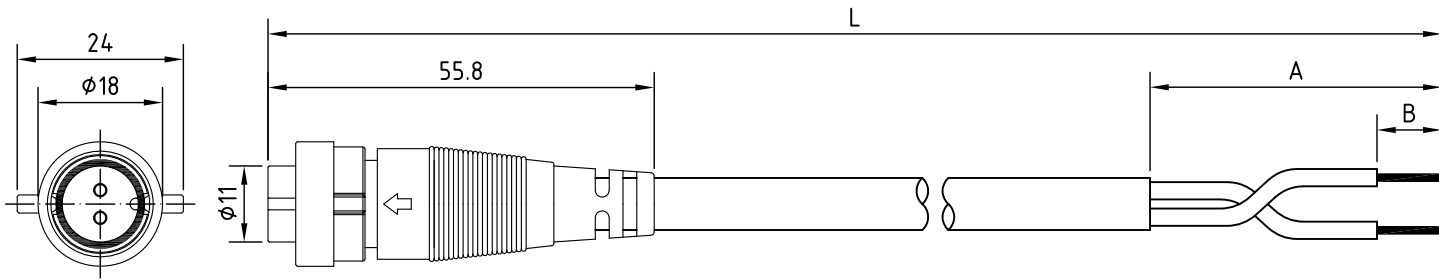

### Specification of connector

#### General Characteristics

- Locking system : Push and Lock
- Termination : solder
- Shell protection : IP68
- Contact resistance :  $\leq 10m\Omega$
- Insulation resistance :  $\geq 10M\Omega$

#### Materials

- Socket contact : brass
- Contact plating : gold
- Female insert : PA
- Ring nut : PA
- O-ring : rubber

### Specification of cable

| Material Jacket | PVC | PUR |
|-----------------|-----|-----|
|                 |     |     |

RoHS

| CONTACT ARRANGEMENT FRONT VIEW (FEMALE) | 2P   | 3P | 4AP | 4BP  | 5P   | 6P | 7P | 8P  | 10P | 12P |
|---|------|----|-----|------|------|----|----|-----|-----|-----|
| Rated voltage                           | 250V |    |     | 250V | 125V |    |    | 60V |     |     |
| Rated current                           | 10A  |    |     | 5A   |      |    | 2A |     |     |     |



**Unicable Co., Ltd. 國陽電業有限公司**  
 5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.  
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

|      |           |          |                 |
|------|-----------|----------|-----------------|
| DATE | 2016/10/7 | PART NO. | UT-D210F4-2S-XP |
| DWN  | GINA      | REV.     | 1               |
| CHK  |           |          |                 |
| UNIT | MM        |          |                 |

|      |                        |
|------|------------------------|
| ITEM | Sensor Connector M15.5 |
|------|------------------------|