

| REV. | Description | Date |
|------|-------------|------|
|      |             |      |

### Specification of connector

#### General Characteristics


- Locking system : Push and Lock
- Termination : solder
- Shell protection : IP68
- Contact resistance :  $\leq 10\text{m}\Omega$
- Insulation resistance :  $\geq 10\text{M}\Omega$

#### Materials

- Pin contact : brass
- Contact plating : gold
- Male insert : PA
- Ring nut : PA
- O-ring : rubber

### Specification of cable

| Material Jacket | PVC | PUR |
|-----------------|-----|-----|
|                 |     |     |

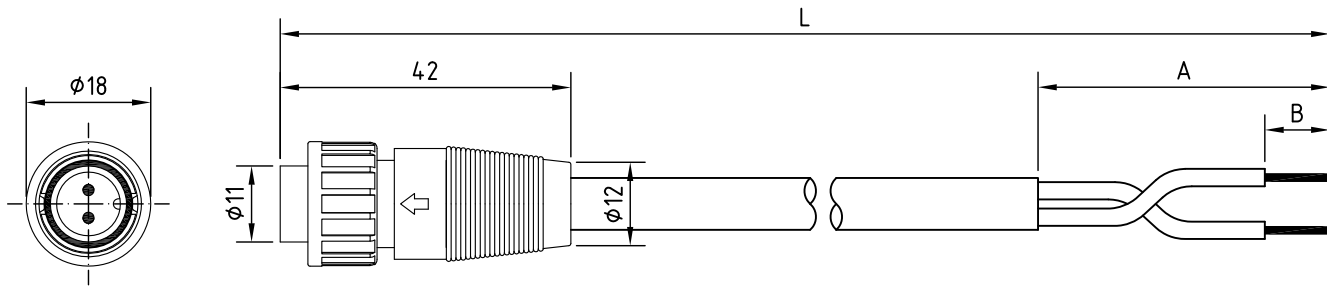

RoHS

| CONTACT ARRANGEMENT FRONT VIEW (MALE) |      |    |
|---------------------------------------|------|----|
|                                       | 2P   | 3P |
| Rated voltage                         | 250V |    |
| Rated current                         | 10A  |    |



**Unicable Co., Ltd. 國陽電業有限公司**  
 5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.  
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

|      |           |          |                |
|------|-----------|----------|----------------|
| DATE | 2016/10/7 | PART NO. | UT-D210M3-2-XP |
| DWN  | GINA      | REV.     | 0              |
| CHK  |           |          |                |
| UNIT | MM        |          |                |

|      |                        |
|------|------------------------|
| ITEM | Sensor Connector M15.5 |
|------|------------------------|