


REV.	Description	Date
1	upgrade drawing	2014/3/17

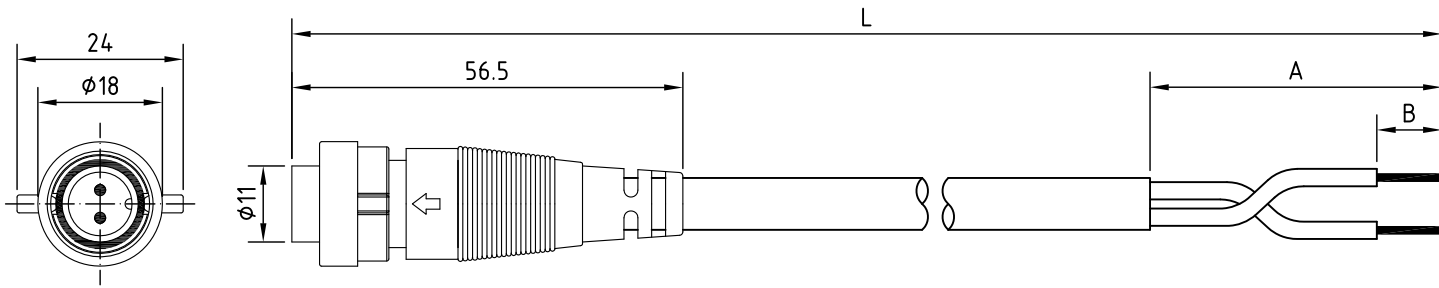

Specification of connector

General Characteristics

- Locking system : Push and Lock
- Termination : solder
- Shell protection : IP68
- Contact resistance : $\leq 10m\Omega$
- Insulation resistance : $\geq 10M\Omega$

Materials

- Pin contact : brass
- Contact plating : gold
- Male insert : PA
- Ring nut : PA
- O-ring : rubber

Specification of cable

Material	Jacket	PVC	PUR

RoHS

CONTACT ARRANGEMENT FRONT VIEW (MALE)	2P	3P
Rated voltage	250V	
Rated current	10A	



Unicable Co., Ltd. 國陽電業有限公司
 5F., No. 111-33, Sec. 4, San Ho Road, San Chung City, Taiwan, R.O.C.
<http://www.unicable.com.tw> TEL:+886-2-2286-2122 FAX:+886-2-2286-1010

DATE	2016/10/7	PART NO.	UT-D210M4-2S-XP
DWN	GINA	REV.	1
CHK			
UNIT	MM		

ITEM	Sensor Connector M15.5
------	------------------------